



## i-PRO management software for multi-recorder multi-site system

### Key Features: WV-ASM200

- Supports 16:9 video stream and 16:9 HD monitor. Displays 16:9 and 4:3 videos from IP cameras on the same screen.
- H.264 recording data in the SD/SDHC/SDXC memory card can be downloaded.
- Convert file format from n3r (proprietary format) to MP4.
- Online management system enables easy use without dongle.
- Up to 100 recorders, 64 encoders and 256 directly connected cameras can be registered. Up to 6,400 cameras registered in the recorders and 256 cameras registered in the encoders are automatically registered in the WV-ASM200 (the number of the cameras depends on the recorder and encoder).
- With WV-ASE203<sup>\*1</sup>, maximum 500 recorders can be registered, up to 32,000 cameras registered in the recorders are automatically registered in the WV-ASM200 (the number of the cameras depends on the recorder and encoder).
- Live images can be received directly from the camera/encoder or via the recorder enabling flexible network design.
- Multi-Monitor option enables simultaneous use of Operation Display (1 / 4 / 9 / 16 split), Live Display (1 / 4 / 9 / 16 split) and Map Display each on a dedicated monitor.  
Single or two monitor operation is also available. A total of 20 screens can be displayed with the simultaneous use of the Operation Display and the Live Display at a time.<sup>\*2</sup>  
With WV-ASE202, maximum 64 screens in operation display is possible.
- Up to 16x 30 ips/camera images can be displayed in H.264 1.5 Mbps mode (VGA:Normal quality mode) or MPEG-4 2 Mbps mode (VGA: Normal quality mode, QVGA:High quality mode, depending on the camera and camera setup).
- Up to 400 camera groups: Cameras and multiscreen mode for the Operation Display can be programmed and called up by manual or sequence operation.
- Image resolution dynamically changes depending on the screen mode: VGA for Quad screen, QVGA for 16 split screen, enabling optimum network usage (depending on the camera model).
- Panasonic camera control: Pan/Tilt, Zoom, Focus, Brightness, Preset position call and program (up to 256), Auto mode, AUX 1 ~ 3, Click Centering, Wheel Zoom, Specified area zoom by mouse dragging (depending on the camera model)
- A camera, a group or a sequence can be called up on the Operation Display by their ID with the optional system controller WV-CU950.<sup>\*2</sup> The camera displayed in the active window can be controlled by the system controller. Recorder playback operation can also be made by the system controller with Jog/Shuttle.
- Alarm notification: A pop-up alarm message is displayed.
- Individual alarm reset is possible.
- Operation Display, Live Display, and Map Display reacts correspondingly with the alarm.
- Displays the present alarm log in red.
- When an alarm occurs, the monitor changes into the map automatically showing where the alarm happened.
- Illustrated camera, alarm and recorder icons for intuitive operations
- Up to 64 camera icons can be freely positioned on a map with alarm status indicated by the color of the icons.<sup>\*2</sup>
- Recorded images of up to 64 cameras (in case with WJ-ND400) can be downloaded by one operation. Downloaded images can be viewed by the viewer software (provided).
- Sophisticated user management: User authentication with time limited password, 5 user levels, User-Camera View/Control partitioning in conjunction with recorder's user management function, Up to 32 user registrations
- System logs can be saved in CSV format. Operation logs can automatically be erased when specified time has passed (31 / 92 / 184 / 366 days).
- Audio from a camera can be heard and the operator voice can be transmitted to the camera's audio output through the network (single channel at a time, full/half duplex depending on the camera).
- Recorded audio with the WJ-ND200 or WJ-ND400 or WJ-NV200 can be played back (single channel at a time).
- Video Analytic functions of the WJ-NT314 such as intruder detection and object abandonment/removal detection can be displayed.
- When used with WJ-ND400 series, WJ-HD716/616, WJ-NV200, VMD search can be operated.
- 1-screen/4-screen PTZ compensation function (hereinafter compensation function) from the fish-eye images of the Panasonic Fisheye network cameras (WV-SF438/WV-SF448/WV-SW458)

<sup>\*1</sup> WV-ASE203 4 licenses are necessary. <sup>\*2</sup> WV-ASE201 is necessary.

## Extension Softwares

### Key Features:

#### WV-ASE201

- Add Live window, Map window in addition to the Operation window (3 monitors)
  - Control using the Ethernet System Controller WV-CU950
  - Expand the maximum numbers of screens to 20.
- \* To use the multi-monitor function, it is necessary to install an additional video card on the PC in use.

#### WV-ASE202

- Expand the maximum numbers of screens to 64.
- Up to 4 live windows.
- Multi-monitor function using up to 6 PC monitors.
- To display the operation window, the map window and the 4 map windows simultaneously.

#### WV-ASE203

- Expand the maximum numbers of registered recorders, encoders and cameras to 100, 64 and 256 respectively.
- Up to 4 licenses for the WV-ASE203 can be added.

#### WV-ASE204

- Decoder registration: Up to 10 decoders

#### WV-ASE205

- Visibility Enhancement Function

##### Spatial Tonal Correction

##### Snowfall and Rainfall Noise Reduction

##### Multi-frame Synthesis Noise Reduction



Spatial Tonal Correction , Snowfall and Rainfall Noise Reduction

#### WV-ASE231

- Extension software for connecting to Facial Recognition Analytics Platform (WV-ASF900)

##### Face Search

##### Face Matching

##### People Counting, Age and Gender Statistics


\* WV-ASF900 is necessary.



Face Search



People Counting,  
Age and Gender Statistics

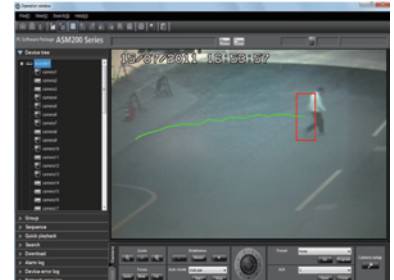

i-VMD  
(Intelligent Video Motion Detection)  
track path display

\* WV-ASE200 is required for each cameras.

## Optional Accessory

Ethernet System Controller with  
3D-Joystick & Jog/Shuttle  
**WV-CU950**  
(WV-ASE201 is necessary.)



## Software Comparison Chart

Functions			WV-ASM200 (V.2.0 or later) Management Software - Basic	+WV-ASE201 Extension Software	+WV-ASE202 Extension Software	+WV-ASE201 +WV-ASE202 Extension Software	+WV-ASE203 Extension Software	+WV-ASE204 Extension Software	+WV-ASE205 Extension Software	+WV-ASE231 Extension Software
Main Functions / Description			Live / Playback / Control							
Supported Devices	Camera	Direct	i-PRO series							
		Via Recorder	i-PRO series, BB series <sup>*1</sup>							
	Recorder	NVR	WJ-ND400 series, WJ-ND300 series, WJ-ND200 series,WJ-NV200 series							
		DVR	WJ-HD716/616, WJ-HD300A series							
	Encoder		WJ-GXE500							
	Decoder							WV-GXD400		
Controller				WV-CU950		WV-CU950				
Max. Devices	Camera	Direct	256				Max. 1,280 <sup>*2</sup>			
		Via Recorder	6,400 (with WJ-ND400 series)				Max. 32,000 (with WJ-ND400 series) <sup>*2</sup>			
			3,200 (with WJ-ND300 series)				Max. 16,000 (with WJ-ND300 series) <sup>*2</sup>			
			1,600 (with WJ-ND200 series / WJ-NV200 series)				Max. 8,000 <sup>*3</sup> (with WJ-ND200 series) <sup>*2</sup>			
			Via Encoder	256 (with WJ-GXE500)				Max. 1,280 <sup>*3</sup>		
		Via Decoder								
	Recorder	100				500 <sup>*3</sup>				
	Encoder	64				320 <sup>*3</sup>				
	Decoder						10			
	Controller			1		1				
	Supported Image Format		H.264, MPEG-4 (i-PRO series), M-JPEG							
	Supported Image Resolution		2,048 x 1,536, 1,920 x 1,080, 1,280 x 960, 1,280 x 720, 960 x 720, 800 x 600, 640 x 480, 640 x 360, 320 x 240, 320 x 160 (depending on the source equipment)							
Max. screens		16	20	64	68					
AVMD Display (Frame and Tracking Line)		Yes								
Multiple Monitors Supported			Yes (Up to 3 monitors: Operation / Live / Map)		Yes (Up to 6 monitors: Operation / Live / Map)					
Map Function			Yes		Yes					
Audio		Yes (Live: 2-way, Playback: 1-way)								
Event Search (T&D, Event type etc.)		Yes								
VMD Search		Yes  (with WJ-ND400 series, WJ-HD716/616, WJ-NV200)								
Image Download		Yes								
Visibility Enhancement									Yes	
Face Search <sup>*3</sup>										Yes
Face Matching <sup>*3</sup>										Yes
People counting <sup>*3</sup>										Yes
Age and Gender Statistics <sup>*3</sup>										Yes

<sup>\*1</sup> Specific Models only. Also, JPEG only is supported and camera control is not supported.

<sup>\*2</sup> WV-ASE203 x 5 licenses and 500 recorders are necessary.

<sup>\*3</sup> WV-ASF900 is necessary.

## About the optional registration


### <The extensive options for Fisheye network cameras>

To use the extensive options for Fisheye network cameras, registration is required. To register the options, it is necessary to enter the "Registration Key" obtained from the Key Management System. Refer to the provided "Activation Key Card" to obtain the "Registration Key" of this software. Enter the following numbers for the Activation Key No. and the Registration ID.

Activation Key No. : 0401-0065-000A-1234      Registration ID : 2397-55CC

<sup>\*</sup> To use the options, WV-ASM200 Ver.1.40 or later (option) is required.    <sup>\*</sup> Refer to "WV-ASM200 Series Setup Instructions (PDF)" for how to register the options for the product in use.

## System Example

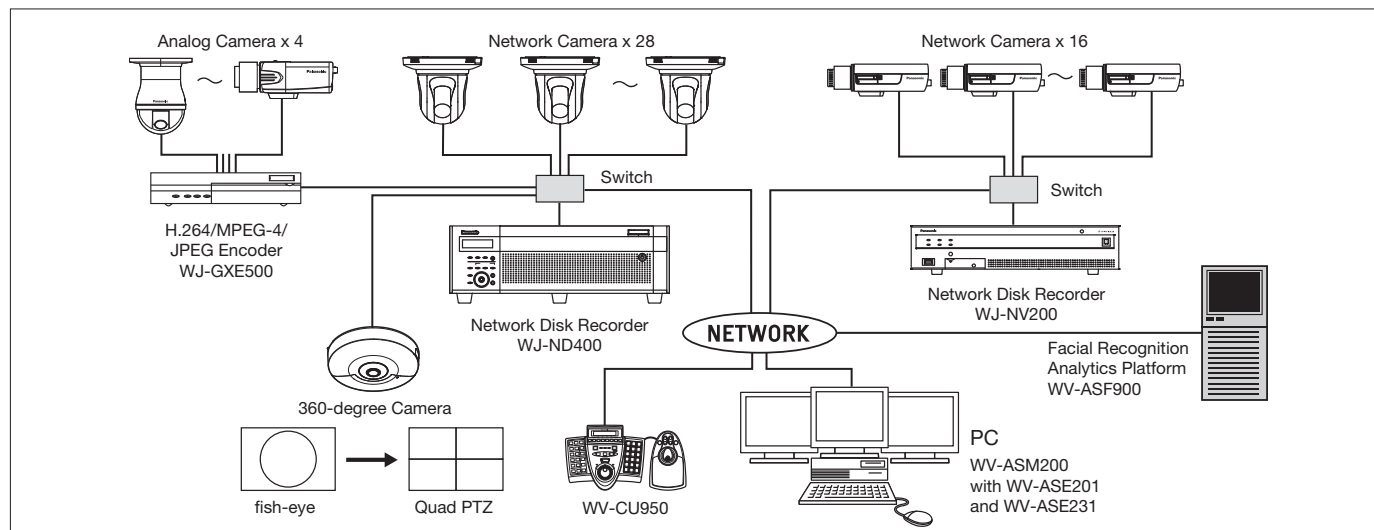

## Specifications: WV-ASM200

<b>GUI Function</b>	Camera Control (depending on the Camera)	Pan/Tilt, Zoom, Focus, Brightness, Preset position call and program (up to 256), Auto mode (SEQ, SORT, AUTO PAN, PATROL, AUTO TRACK), AUX 1 ~ 3, Click centering, Wheel zoom, Drag and zoom
	Recorder Control (depending on the Recorder)	REC, PLAY, Rev PLAY, Pause, Stop, FF (up to 96x), REW (up to 96x), Prev Record, Next Record, Prev Image, Next Image, Skip (up to 60 min.), Rev Skip, (up to 60 min.) Text
	Event Search	Target: Recorder (Camera) / Group / Map*1, Search criteria: Time date, Event type, Text
	VMD Search	In case with WJ-ND400 series, WJ-HD716/616, WJ-NV200, WV-ASR500
	Multiscreen Mode	Spot / Quad (A-D) / 9 split / 16 split
	Sequence Display	10 programs, 64 steps/pattern, Spot / Quad / 9 split / 16 split Dwell time: 3s / 5s / 10s / 15s / 20s / 25s / 30s / 35s / 40s / 45s / 50s / 55s / 1min
	Display Performance	30 ips x 16 screens at H.264 1.5 Mbps, 30 ips x 16 screens at MPEG-4 2 Mbps
	Multi-Monitor *1	Up to 3 monitors (Operation / Live / Map), Up to 20 cameras can be displayed (Operation-4, Live-16)
	Camera Group Display	Up to 400 groups with 16 alphanumeric titles
	Number of Maps *1	Up to 100 maps (JPEG or Bit map), Link: 64 cameras and 20 maps / map
	Image Download	Recorded images of up to 64 cameras (in case with WJ-ND400) can be downloaded Manual download only. Viewer software can be extracted from the main software.
	SD memory Download	Indicates the function featured in some Panasonic's cameras that transfers H.264 video files (mp4 files) saved on the SD memory card equipped with the camera to a PC using the FTP function.
	Recorder/Camera Access	The access to the Recorder and Camera Web pages when logged in as admin
	File Conversion	Convert a n3r file to the standard format (mp4)
	Camera Title Display	On the GUI, Up to 16 characters
	Clock Display	On the GUI, Time: 12H/24H, Date: 5 formats (When the image comes from the recorder)
	Alarm Source	Panasonic alarm protocol
	Alarm Control	Reset, Auto reset (OFF / 10s / 20s / 30s / 1min / 5min)
	Alarm Action	Up to 16 alarm images can be displayed on the live monitor. Corresponding camera icon on the map lights up. Alarm message on the GUI and buzzer.
	Digital Zoom	Up to 4 times
	Text Attachment	Free comment can be attached for each record and reviewed at later time. Up to 200 characters
	System Log	Operation (100,000), System (1,000), Network error (1,000), Rec order error (1,000), Alarm (30,000)
	Recorder Log Download	Operator access, Network error, Error, Event
	User Management	Registration: Up to 32 users + Administrator, ID: 4-14 digit, PW: 4-8 digit, User level: 5 levels (Programmable), PW time limit: OFF / 31 / 92 / 184 / 366 days, Auto login: ON / OFF
	Security Method	User authentication (ID and Password), Host authentication (IP address), Alteration detection, Activation Key Card
	System Setup	Setup page in English, French, Italian, Spanish, German, Russian, Chinese, Japanese
<b>General</b>	GUI Language	English, French, Italian, Spanish, German, Russian, Chinese, Japanese
	Supported OS*2	Microsoft® Windows® 8.1 Pro 32bit/64bit*3, Microsoft® Windows® 8 Pro 32bit/64bit*3, Microsoft® Windows® 7 Professional SP1 32bit/64bit*3, Microsoft® Windows Vista® Business SP2 32bit/64bit*3 The language of the OS must be same as selected GUI language.
	Required PC	CPU
		Intel® Core™ i5-2400, 2500, Intel® Core™ i7-860 or faster When adding the license for WV-ASE202 and displaying images on a 64-screen: Intel® Core™ i7-3770 When adding the license for WV-ASE205 (Visibility enhancement function) : Intel® Core™ i7-4770 or faster *Recommend a PC exclusively for WV-ASE205.
		Memory
		3 GB or more, When using more than one live window: 4 GB
		Graphic accelerator
		VRAM: 512 MB or more (256 MB min.), compatible with Microsoft® DirectX® 9.0c or later When using WV-ASE202: NVIDIA NVS510 x 2 When using WV-ASE205 (Visibility enhancement function): NVIDIA GeForce® GTX 660 or more (The version GeForce 332.21 or later is recommended for the driver software)
		CD-ROM drive
		Necessary to install this software
	Required HDD space	Approx. 3GB
<b>Network</b>	Proxy	HTTP proxy supported (IP address and port No.)
	FTP	Passive/Active
	Playback Control	Play, Rev Play, Pause, FF, REW, Prev Record, Next Record, Prev Image, Next Image
	Additional Functions	Alteration detection, Save as JPEG, Two times zoom, Print
<b>Viewer Software</b>	Playback Control	Play, Rev Play, Pause, FF, REW, Prev Record, Next Record, Prev Image, Next Image
	Additional Functions	Alteration detection, Save as JPEG, Two times zoom, Print


\*1 WV-ASE201 is necessary. \*2 Microsoft® Windows® XP not supported

\*3 It is out of warranty that you use the two graphical board together.

In case of 4 monitor output in a graphical board, you should design the followings only.

- + Operational monitor, Map monitor, live monitor 1 and live monitor 2
- + Operational monitor, live monitor 1, live monitor 2 and live monitor 3

## Operation Window

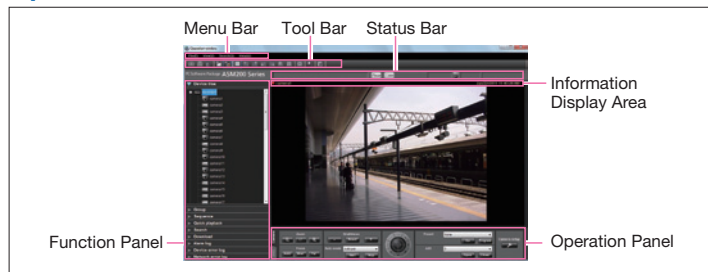

### Trademarks and registered trademarks

- Microsoft, and Windows are registered trademarks of Microsoft Corporation in the U.S. and other countries.
- Intel and Intel Core are registered trademarks of Intel Corporation.
- NVIDIA, GeForce are registered trademarks of NVIDIA Corporation in the U.S. and/or other countries.
- "i-PRO SmartHD" logo is trademarks or registered trademarks of Panasonic Corporation.

### Important

- Panasonic recommends a dedicated PC to prevent installation errors and to keep best performance.
- Safety Precaution: Carefully read the Important Information, Installation Guide and operating instructions before using this product.
- Panasonic cannot be responsible for the performance of the network and/or other manufacturers' products used on the network.
- When remote monitoring, please pay attention to the network design. For details, please contact your local Panasonic sales representatives.

- All TV pictures are simulated.
- Masses and dimensions are approximate.
- Specifications are subject to change without notice.

DISTRIBUTED BY:

**Panasonic**

<http://security.panasonic.com>



<http://www.facebook.com/PanasonicNetworkCamera>

(2A-081EL)